
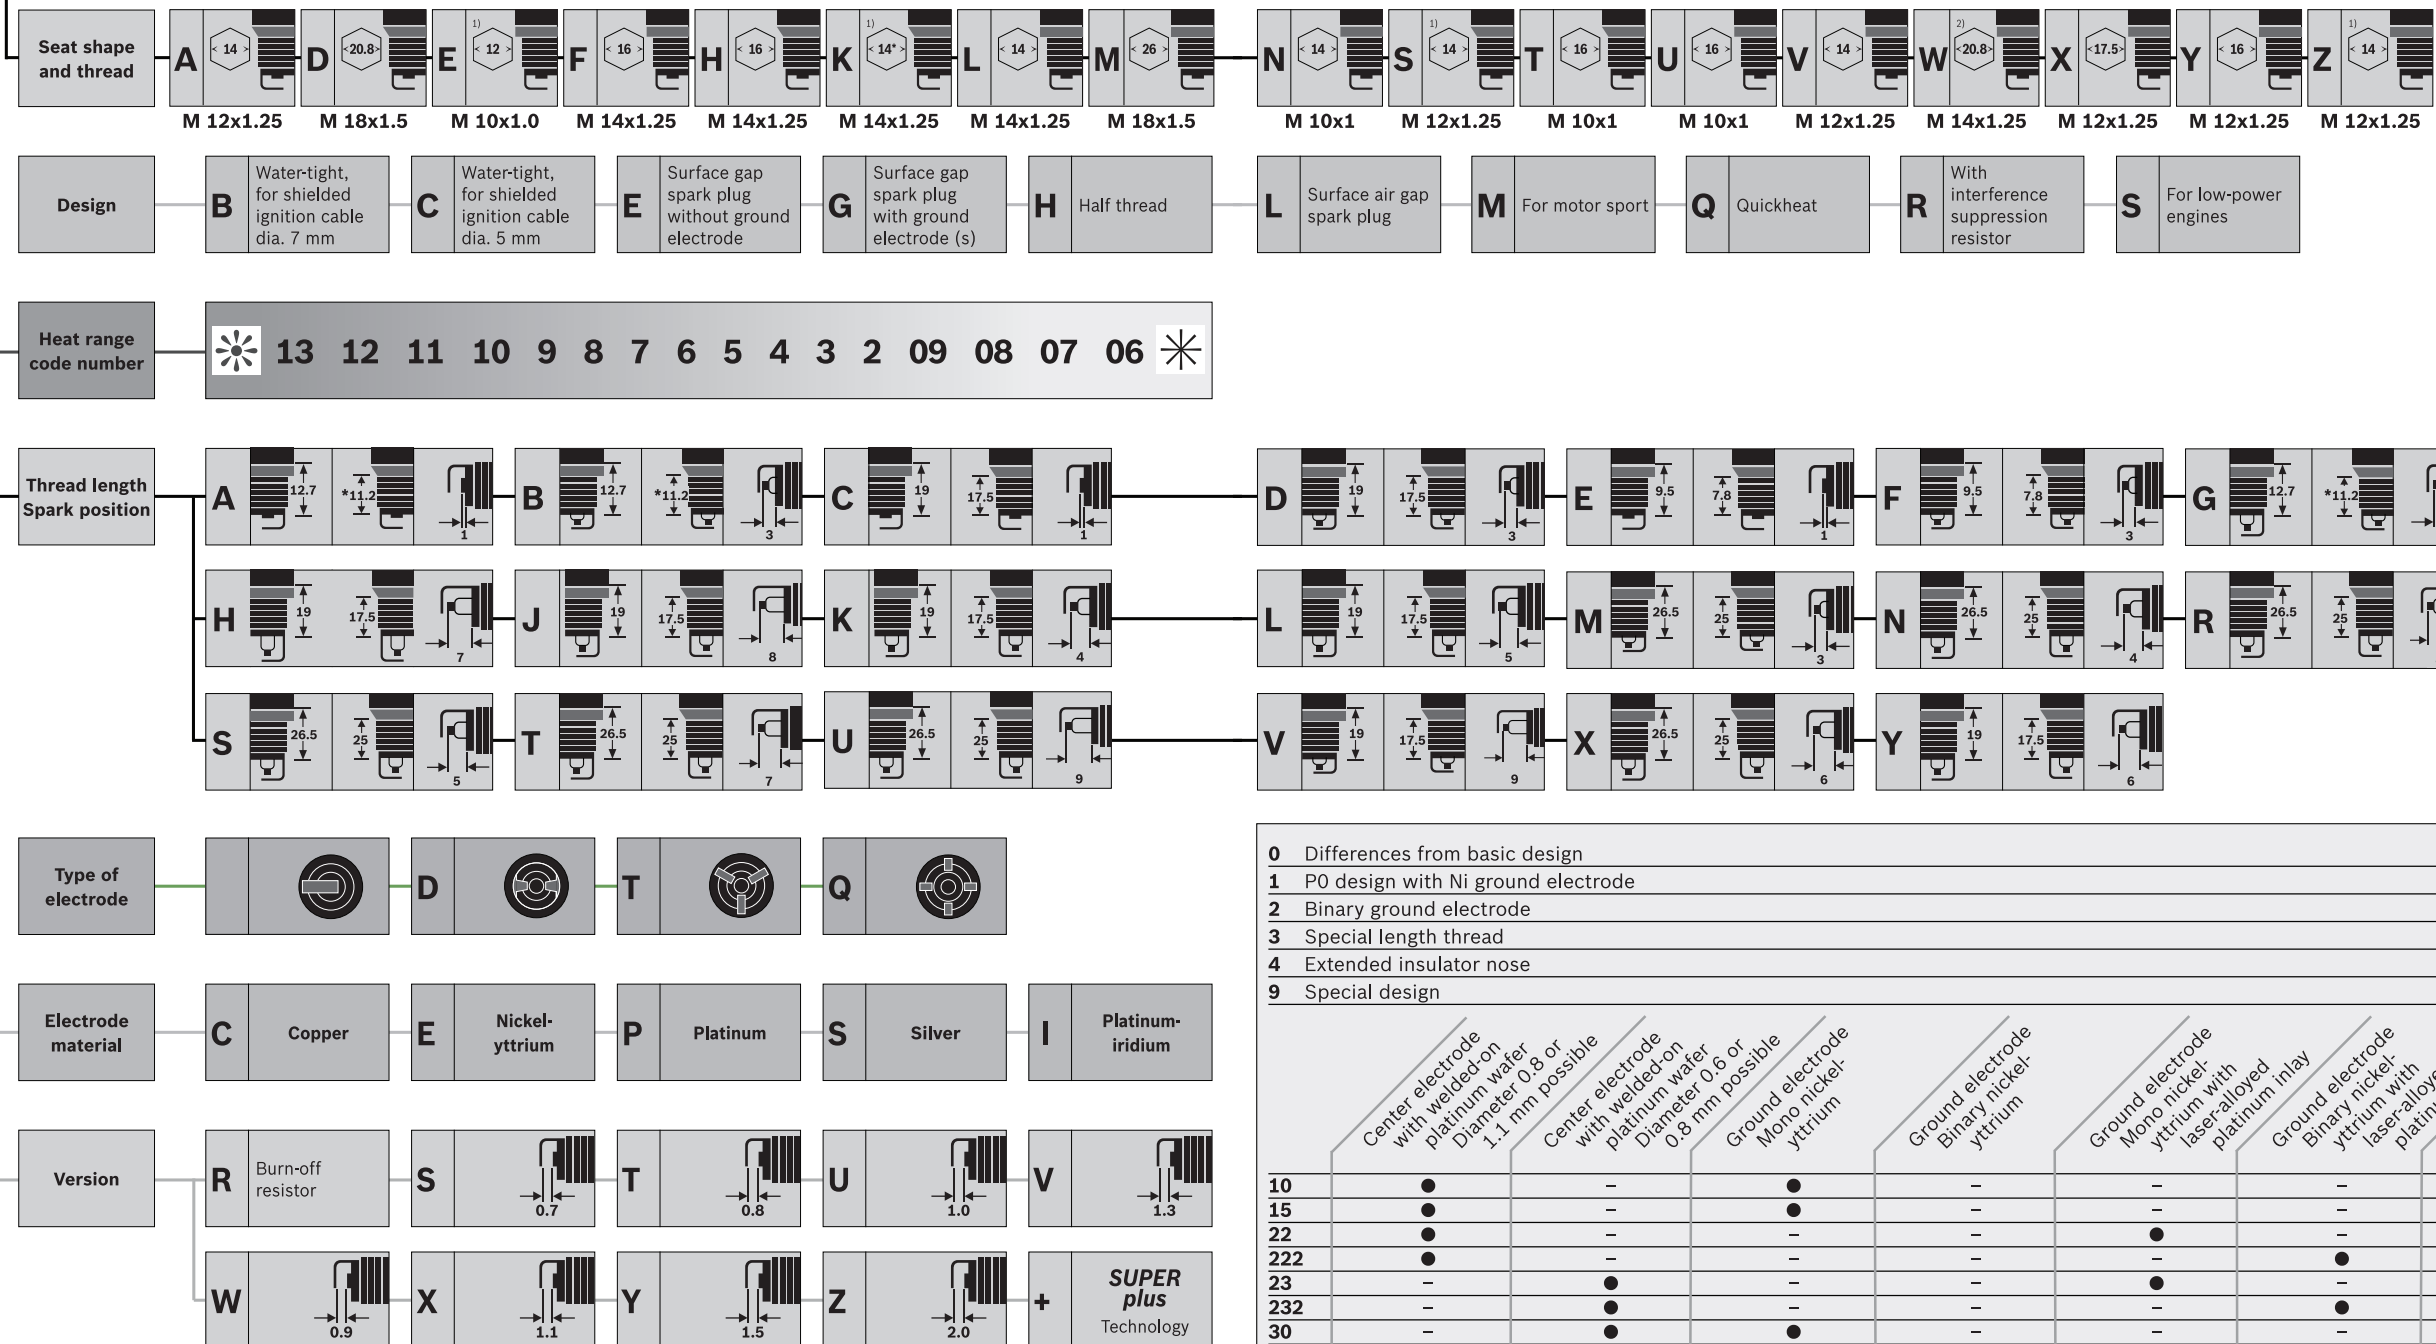


# Numbering System

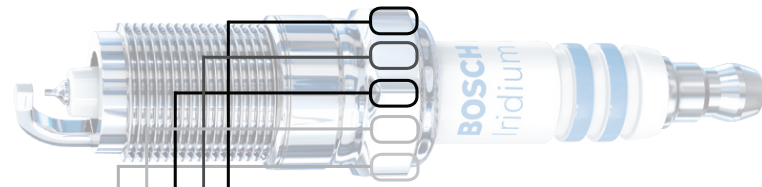

	0 Differences from basic design		9 Special design				
	1 PO design with Ni ground electrode	2 Binary ground electrode	Center electrode with welded-on platinum wafer Diameter 0.8 or 1.1 mm possible		Ground electrode Binary nickel- yttrium	Ground electrode Mono nickel- yttrium with laser-alloyed platinum inlay	Ground electrode Binary nickel- yttrium with laser-alloyed platinum inlay
10	●	-	-	-	-	-	-
15	●	-	-	-	-	-	-
22	●	-	-	-	-	●	-
222	●	-	-	-	-	-	●
23	-	-	●	-	-	-	-
232	-	-	●	-	-	-	●
30	-	-	●	-	-	-	-
302	-	-	●	-	●	-	-
33	-	-	●	-	-	●	-
332	-	-	●	-	-	-	●

\* The thread length for spark plugs with seat shape D and spark position A or B is 10.9 mm.

<sup>1)</sup> Double hexagon <sup>2)</sup> Hexagon size 19.0 mm for low-power engine version WS